



VC-C101U-ETH (HW2)

USB-C to HDMI 2.0 Converter


USB HUB Upgrade Instruction

Version: USB-C upgrade instruction_v3


Firmware Upgrade

This FW will upgrade USB HUB chipset to permanent prevent a pop-up notification when connecting a Windows PC to VC-C101U-ETH(HW2).

Note: This pop-up is only related to HW Rev 2 version of VC-C101U-ETH

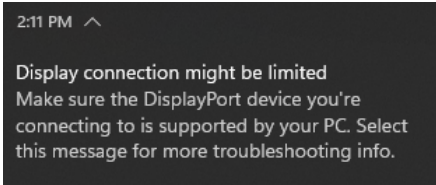


1. Use a Windows PC with admin rights and a USB-C port.
2. Open the FW upgrade package folder and read the README file.
3. In the upgrade folder, open the upgrade tool "VLIHUBWinUSBTool"

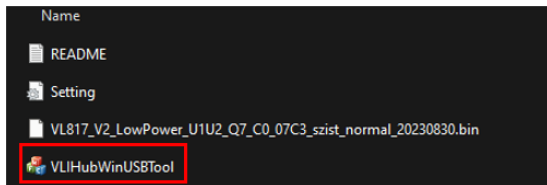

4. Power on the VC-C101U-ETH and connect the USB-C cable between the PC and VC-C101U-ETH. Click "Refresh" to connect to the unit.




5. Verify that the current firmware is 0700.

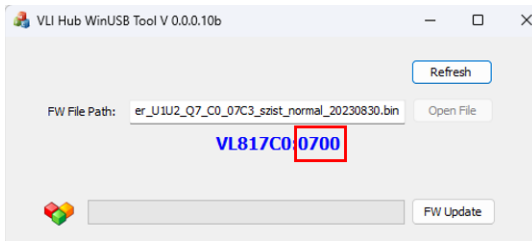


6. When verified firmware is 0700, click on "FW Update".



7. When “Device Update Success” is shown, please power cycle the VC-C101U-ETH.

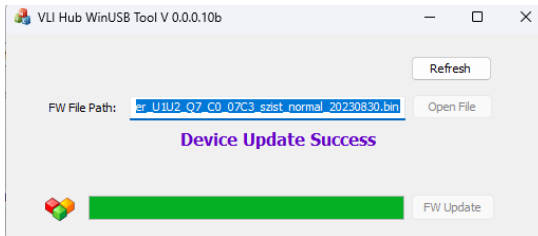

8. Click on refresh again to verify the new firmware 07C3.

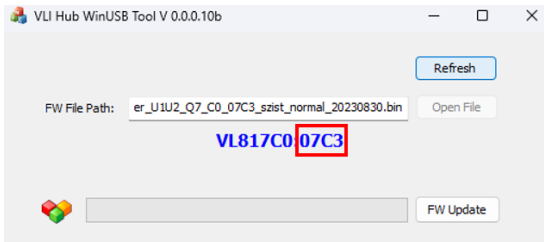

9. Upgrade done.